

DRYER MOUNTING TEMPLATE

Fix this card to the wall.

Drill 4 holes

(A. B. C. D. 5/16" (8 mm) diameter: 1-3/8" (35 mm) depth.)

Electrical Connection Description

1. Secure the base plate on the wall provided.
2. The conduit in place by suitable 1/2 inch trade conduit fitting.
3. Connections:
 - A. Connect the live wire (colored red or brown or white) to the terminal block where marked " L ".
 - B. Connect the neutral wire (colored black or blue) to the terminal block where marked " N ".
 - C. Connect the earth wire (colored green and yellow or green), note bare earth wires should be sleeved with green and yellow or green sleeving to the ground washer where marked with the earth symbol " ⊕ ".



Note that colors of live and neutral wires depend on voltage of supply service.

Mounting heights from bottom of dryer

Men	50"	(1270 mm)
Woman	47"	(1194 mm)
Children 4-7 years	35"	(889 mm)
Children 8-10 years	39"	(991 mm)
Children 11-13 years	43"	(1092 mm)
Children 14-16 years	47"	(1194 mm)
Handicapped	40"	(1016 mm)

8.8" (224 mm)

BLUSTORM
HIGH SPEED HAND DRYER

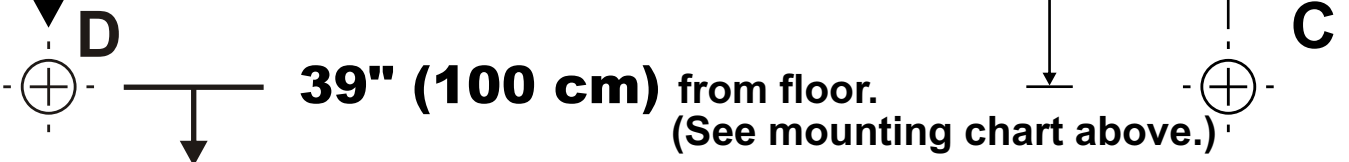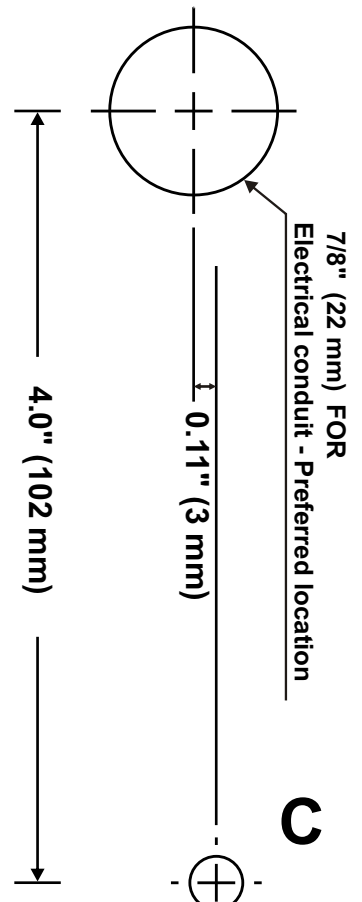

39" (100 cm) from floor.
(See mounting chart above.)